




ROBO-6911VG2AR

Intel® 6th Skylake-S processor based on PICMG 1.3 half size SHB with DDR4 SODIMM, DP, DVI-I, Dual Gigabit Ethernet, mSATA, Audio, USB

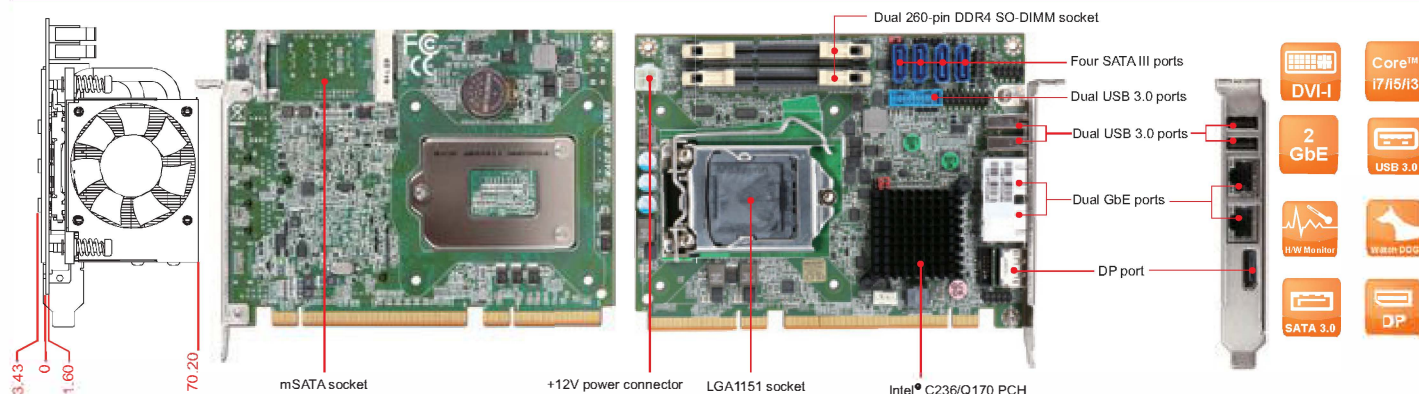

ROBO-6911VG2AR is based on Intel® C236/Q170 chipset to support both workstation and desktop processors. Built with flexible PCI express expansions, ROBO-6911VG2AR is suitable for Medical, Industrial automation, and Digital Signage application.

FEATURES

- Support Intel® 6th Skylake-S processor in LGA1151
- Delivers up to 32GB maximum DDR4 2133 ECC or non-ECC SODIMM on two sockets
- Supports multiple display by DP on bracket and on-board DVI-I (DVI-D+VGA)
- High speed dual Gigabit Ethernet based on PCI express x1, high bandwidth I/O interface
- On-board four SATAIII ports, support RAID 0, 1, 5, 10

ORDERING GUIDE

AB1-3D38	(R) ROBO-6911VG2AR PICMG 1.3 half size (PCI-E) .LGA1151. Intel Xeon/Core i3 processors. SHB. w/DP/ DVI-I/Dual GbE/Audio/mSATA
AB1-3D39	(R) ROBO-6911VG2AR-Q170 PICMG 1.3 half size (PCI-E) .LGA1151. Intel i5/i7 processors. SHB. w/DP/DVI-I/Dual GbE/Audio/mSATA

PACKING LIST

Standard	B6902932 SATA III cable B8981980 PICMG SBC Handling and Installation Notice B8983650 Installation CD
Optional	B6902230 USB port cable with bracket AB9-2066 PA-M1AU Multiple Media kit B6903090 USB 3.0 cable with bracket

GENERAL

Processor	- Intel® Xeon® E3-1200v5 series (C236) / Core™ i3 (C236) / i5 (Q170) / i7 (Q170) processors up to 3.6 GHz (35~80W) with (8MB) Cache in LGA-1151 package - DMI x4 Link: 5.0 GT/s - Support Intel® Turbo Boost, Hyper-Threading, Virtualization, Thermal Monitoring, Trusted Execution and SpeedStep Technology (depends on CPU sku)
Chipset	Intel® C236 or Q170
BIOS	AMI uEFI BIOS (SPI ROM)
Memory	- Supports up to 32GB DDR4 2133/1866 SDRAM on two 260-pin ECC or non ECC SODIMM sockets - Supports ECC on C236, non-ECC on Q170
Storage Devices	4x SATAIII ports 1x mSATA socket
Watchdog Timer	Programmable via S/W from 0.5 sec. to 254.5 sec
Hardware Monitoring	System monitor (Voltage, Fan Speed and Temperature)
Expansion Interface	- From CPU (Xeon/Core™ i3): 1x PCI Express x16 or 2x PCI Express x8 or 1x PCI Express x8 + 2x PCI Express x4 by jumper setting (Gen3 up to 8.0 GT/s) - From CPU (Core™ i5/i7): 1x PCI Express x16 (Gen3 up to 8.0 GT/s) - From PCH: 1x PCI Express x4 or 4x PCI Express x1 by different bios support (Gen3 up to 8.0 GT/s)

I/O INTERFACE

Super I/O	ITE IT8772E
Audio	- Intel® PCH built-in High Definition Audio up to 192-kHz 32-bit - Realtek ALC886-GR HDA codec, 5.1 channels - one on-board audio pin header
Ethernet	- Intel® WGI219LM + WGI210AT gigabit ethernet controller - Dual 10BASE-T / 100BASE-TX / 1000BASE-T Ethernet - PCI Express x1 interface based on gigabit ethernet - Dual RJ-45 connector with two LED indicators
Serial Port	- 1x RS232/422/485 selectable by bios
USB	- 4x USB3.0 ports (2 ports on bracket)
Keyboard & Mouse	2x USB3.0 ports on bracket dedicated to keyboard & mouse
GPIO	On board programmable 8-bit Digital I/Os

DISPLAY

Graphic Controller	Intel® 6th Skylake-S processors integrated graphics engine
Display Interface	Support independent triple display by - CRT on bracket: Resolution up to 1920x1200 @ 60Hz - DVI-D on bracket: up to 1920x1200 @ 60Hz (CRT + DVI-D by on-board DVI-I connector) - DP: up to 4096x2304@60Hz (on bracket)

Mechanical & Environment

Dimension	167.64mm(L) x 126.39mm(W), 6.6" (L) x 4.98" (W) -PCB: 10 layers
Power Supply	Typical: +12V, +5VSB -Support ATX mode
Environment	Operatin Temperature: 0~60°C -Storage Temperature: -20~80°C -Relative Humidity: 5~90%, non-condensing
MTBF	Over 100,000 hours at 40°C

