


ROBO-8112VG2AR

Intel® Xeon® E3-1200v3/Core™ i3 series processor based on PICMG 1.3 SHB with DDR3 SDRAM, VGA, Dual Gigabit Ethernet, Audio and USB

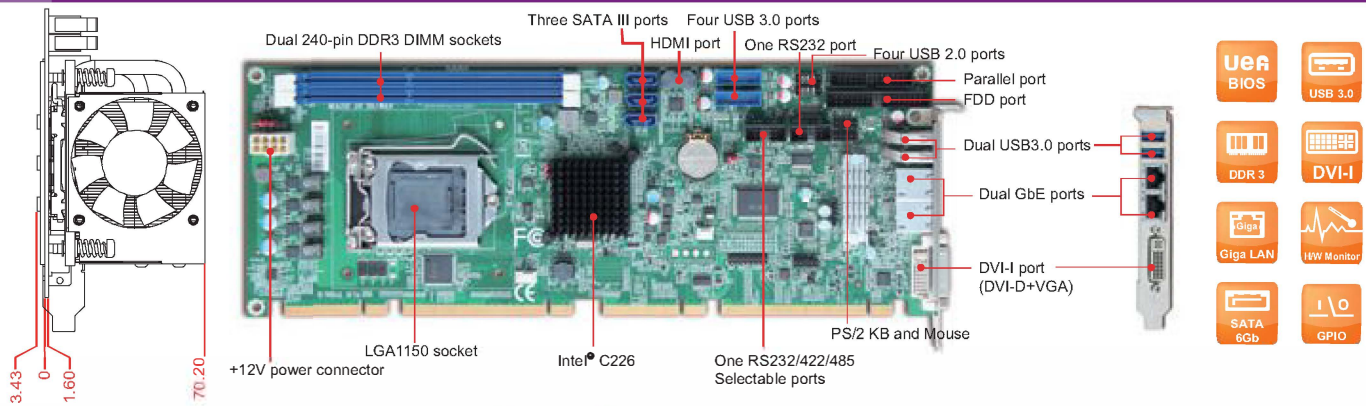

ROBO-8112VG2AR is based on Intel® C226 chipset and workstation processor sku like Xeon® and Core™ i3. Build with flexible PCI express expansion, it's suitable for Medical, Industrial automation, and Digital Signage applications.

FEATURES

- Supports Intel® Xeon® E3-1200v3 series/ Core™ i3 processors in LGA1150 package
- Delivers up to 16GB maximum DDR3 1333/1600 ECC SDRAM on two DIMM sockets
- Supports triple display by DVI-I (DVI-D+VGA) and HDMI
- Supports iAMT 9.0 on Intel® Xeon® E3-1200v3 series processors
- High speed dual Gigabit Ethernet based on PCI Express x1, high bandwidth I/O interface
- Rich I/O connections such as FDD, two Gigabit Ethernet, serial ports, parallel port, USB 2.0/3.0
- On-board five SATA III ports support RAID 0,1,5,10 (dual ports on backplane)

ORDERING GUIDE

AB1-3954	ROBO-8112VG2AR PICMG 1.3(PCI-E+PCI).LGA1150. Intel Xeon/ Core i3 processors.SHB.w/VGA/Dual GbE/ Audio
----------	--

PACKING LIST

Standard	B6902930 SATA III cable (Black) B690021S Cable kit for FDD+PRN with bracket B8981980 PICMG SBC Handling and Installation Notice B6903350 DVI-D + VGA cable B6903240 dual head COM port cable with bracket B3751640 Installation CD
Optional	B6902980 PS/2 Keyboard / Mouse Cable with bracket B6902230 USB port cable with bracket AB9-2066 PA-M1AU Multiple Media kit B6903090 USB 3.0 cable with bracket

GENERAL

Processor	- Intel® Core™ i3 and Xeon® E3-1200v3 series processor up to 3.5 GHz (45~95W) with (8MB) Cache in LGA-1150 package - DMI x4 Link: 5.0 GT/s - Support Intel® Turbo Boost, Hyper-Threading, Virtualization, Thermal Monitoring, Trusted Execution and SpeedStep Technology (depends on CPU sku)
Chipset	Intel® C226 PCH
BIOS	Phoenix uEFI BIOS
Memory	- Supports up to 16GB DDR3 1333/1600 SDRAM on two 240-pin ECC DIMM sockets - Supports ECC
Storage Devices	- Supports 5x SATA III drive (Dual ports via Backplane) - RAID 0,1,5,10 - 1x FDD channel
Watchdog Timer	Programmable via S/W from 0.5 sec. to 254.5 sec.
Hardware Monitoring	System monitor (Voltage, Fan speed and Temperature)
Expansion Interface	- From CPU (Xeon/Core i3): 1x PCI Express x16 or 2x PCI Express x8 or 1x PCI Express x8 + 2x PCI Express x4 by jumper setting (Gen3 up to 8.0 GT/s) - From PCH: 1x PCI Express x4 or 4x PCI Express x1 by different bios support (Gen2 up to 5.0 GT/s) - 4x PCI devices at 32 bit 33 MHz

I/O INTERFACE

Super I/O	ITE IT8728F
Audio	- Intel® BD82C226 PCH built-in High Definition Audio up to 192-kHz 32-bit - Realtek ALC886-GR HDA codec, 5.1 channels
Ethernet	- Intel® WGI217LM + WGI210AT gigabit ethernet controller - Dual 10BASE-T / 100BASE-TX / 1000BASE-T Ethernet - PCI Express x1 interface based on gigabit ethernet - Dual RJ-45 connector with two LED indicators
Serial Port	- 1x RS232 and 1x selectable RS232/422/485 on board
USB	- 8x USB 2.0 ports (four ports through backplane) - 480Mb/s bus capable of high-speed/full-speed/low-speed data ranges - 6x USB 3.0 ports on board (four ports on board, dual ports on bracket) - 5Gbps bus capable of high-speed/ full-speed/low-speed data ranges
Keyboard & Mouse	- 2x USB 3.0 ports on bracket dedicated to keyboard & mouse (on bracket) - 1x 10 pin box header for external PS/2 keyboard/mouse
GPIO	On board programmable 8-bit Digital I/Os
Others	1x Parallel port

DISPLAY

Graphic Controller	- Intel® Xeon® and Core™ i3 processors integrated graphics engine - Provides improved 3D multimedia capabilities including Microsoft DirectX 11.1, Shader Model 4.0, MPEG-2 and OpenGL 3.2
Display Interface	Support independent triple display by - CRT on bracket: Resolution up to 1920x1200 @ 60Hz - DVI-D on bracket: up to 1920x1200 @ 60Hz - HDMI: up to 4096x2160 @ 24Hz (CRT + DVI-D on bracket by DVI-I port)

Mechanical & Environment

Dimension	- 338 5mm(L) x 126 39mm(W), 13 33'''(L) x 4 98'''(W) - PCB: 8 layers
Power Supply	- Typical: +12V@5.29A; +5V@4.94A - Support ATX mode
Environment	- Operation Temperature: 0~60 °C - Storage Temperature: -20~80 °C - Relative Humidity: 5~90%, non-condensing
MTBF	Over 100,000 hours at 40°C

