


WEBS-35C1

Embedded Rugged Fan-less System with
Intel® 6th Skylake-S Core™ i3/i5/i7 based
Mini-ITX Board

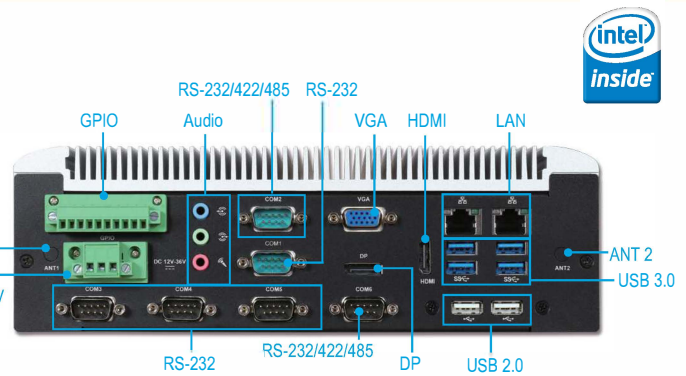

The WEBS-35C1 builds on Intel® desktop Q170 chipset and takes advantages of Intel® Core™ i3/i5/i7 desktop processor technologies that can support dual DDR4 memory. Support two Gigabit Ethernet ports, one M.2 socket and one Mini-PCIe socket. The WEBS-35C1 is an ideal platform with rich I/O and high resolution for POS, kiosk, digital signage, and surveillance security monitoring applications.

FEATURES

- Intel® Core™ i High performance Fan-less Embedded Box PC
- 6th generation Intel® Skylake-S Core™ i3/i5/i7 Desktop processor (Quad-Core CPU supported)
- Dual UB-DIMM DDR4 up to 32GB
- 2x 2.5" SATA HDD/SSD, 1x mSATA
- Rich I/O is good for versatile applications
- 1x M.2 socket, 1x Full-size Mini-PCIe socket
- Rugged design is good for using in harsh environment

ORDERING GUIDE

AS5-3460	(R).ATO.WEBS-35C1.Embedded rugged fan-less system with Intel Skylake-S Core i3/i5/i7 based MINI-ITX system.
----------	---

System

M/B	WADE-8017
System Chipset	Intel® Q170
CPU	- Intel® Core™ i7-6700TE, 2.4GHz, 8M L2 Cache, up to 3.40 GHz, 35W TDP (4C/8T) - Intel® Core™ i5-6500TE, 2.3GHz, 4M L2 Cache, up to 3.30 GHz, 35W TDP (4C/4T) - Intel® Core™ i3-6100TE, 2.7GHz, 4M L2 Cache, 35W TDP (2C/4T) - Intel® Pentium® G4400TE, 2.9GHz, 3M L2 Cache, 35W TDP (2C/2T) - Intel® Celeron® G3900TE, 2.3GHz, 2M L2 Cache, 35W TDP (2C/2T)
BIOS	AMI uEFI BIOS (SPI ROM)
System Memory	Dual 260-pin UB-DIMM socket supports DDR4 2133/1866 Non-ECC up to 32GB
Storage	2x 2.5" SATA HDD/SSD, 1x mSATA (via mini-PCIe socket)
Watchdog Timer	Programmable via S/W from 1 sec. to 255 min.
H/W Status Monitor	- Temperature (CPU & System) - Speed (CPU Fan & System Fan) - Voltage (CPU Vcore, 12V, 5V, 3.3V, VDIMM)
Expansion	- 1x M.2 socket (Type E) with PCIe x1, USB 2.0, SDIO, UART, or I2C signal - 1x Full-size Mini-PCIe socket (can switch to mSATA)

External I/O

Serial Port	6x COM port (2x RS-232/422/485 selectable by BIOS, 4x RS-232)
Display	1x VGA, 1x DP, 1x HDMI
USB	4x USB 3.0, 2x USB 2.0
Audio	Line-in/Line-out/Mic-in (ALC892)
Ethernet	2x Gigabit Ethernet (Intel® I219LM and Intel® I211AT)
GPIO	1x Programmable 8-bit Digital I/O
Other	- 2x Antenna hole for WiFi, 3G/GPS or 4G LTE module - 1x EXT Power Switch

Power Supply Unit

Power Input	DC 12V ~ 36V with 3-pin Terminal block Connector
-------------	--

Environmental

Operation Temperature	-20°C ~ 50°C
Storage Temperature	-40°C ~ 80°C
Relative Humidity	95%@40°C, non-condensing
Operation Vibration	5Grms/10-500Hz, IEC 60068-2-6
Operation Shock	50G, 11 msec, IEC 60068-2-27

Mechanical

Dimension	253(W) x 201(D) x 83(H) mm
Weight	4.5kg
Mounting	Wall mounting

